

## MG HS II


### Models:

AS33 (petrol)  
AS33P (PHEV)  
AS33H (Hybrid+)

(06/2024 - →)

M-268


- PL** **Urządzenie sprzęgające** Instrukcja montażu i eksploatacji
- GB** **Coupling device** Installation and operating instructions
- D** **Kupplungsvorrichtung** Montage- und Gebrauchsanleitung
- ES** **Del dispositivo de acoplamiento** Las instrucciones de instalación y de operación
- RU** **Тягово-сцепное устройство** Инструкция по установке и эксплуатации
- FR** **Dispositif d'accouplement** Notice de montage et d'utilisation
- IT** **Dispositivo accoppiamento** Istruzioni di montaggio
- CZ** **Spojovacího zařízení Tažné** Návod na montáž a použití
- RO** **Dispozitiv de cuplare** Instrucția de montaj și exploatare
- SE** **Kopplingsanordningens** Monterings- och bruksanvisningar.



YES ☒ NO ☐



YES ☒ NO ☐

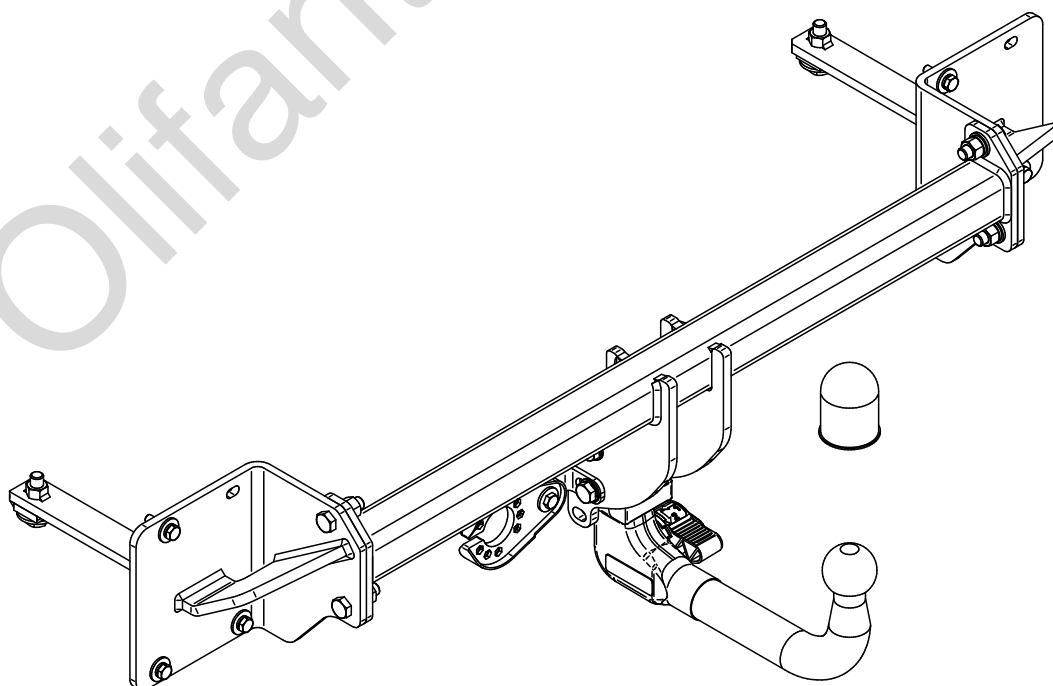


Typ: M-268





F

**E20** 55R-03 7116

D=9,75kN

S=85kg

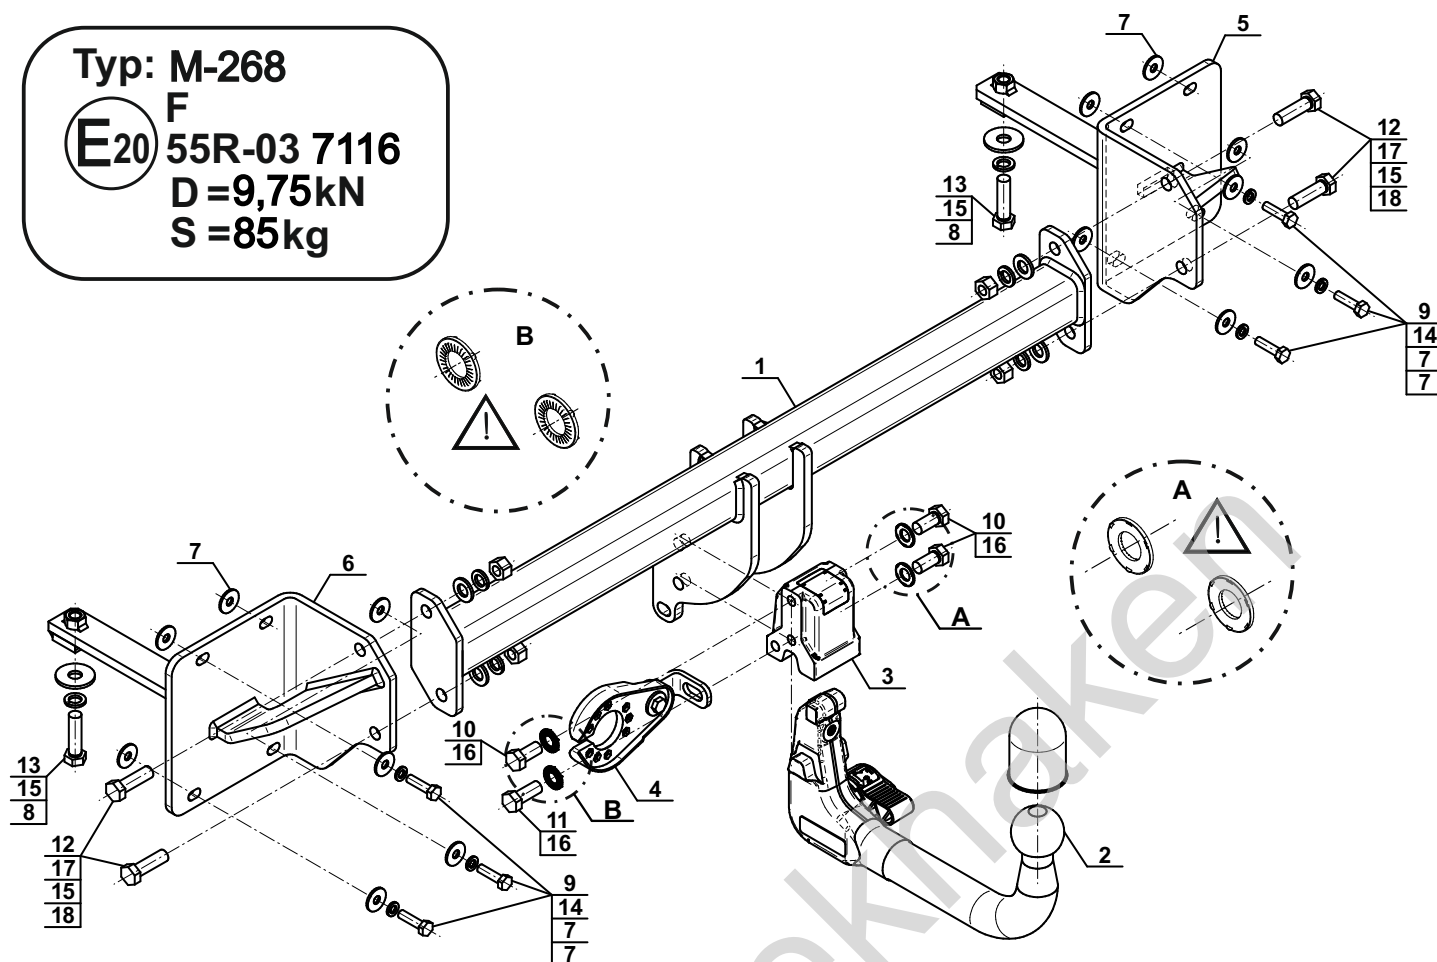


|   |                                                                                                              |    |
|---|--------------------------------------------------------------------------------------------------------------|----|
| 1 |                           | x1 |
| 2 | (W10-6018 / ACS-6018)<br> | x1 |
| 3 |                           | x1 |
| 4 | (CZ-050.00)<br>           | x1 |
| 5 |                           | x1 |
| 6 |                           | x1 |

|    |                                                                                     |                         |     |
|----|-------------------------------------------------------------------------------------|-------------------------|-----|
| 7  |  | Ø24/Ø8,5x2              | x14 |
| 8  |  | Ø37/Ø13x3               | x2  |
| 9  |  | M8x30 (ISO 4017) (8.8)  | x6  |
| 10 |  | M12x25 (ISO 4017) (8.8) | x3  |
| 11 |  | M12x30 (ISO 4017) (8.8) | x1  |
| 12 |  | M12x40 (ISO 4017) (8.8) | x4  |
| 13 |  | M12x45 (ISO 4017) (8.8) | x2  |
| 14 |  | Ø8,2                    | x6  |
| 15 |  | Ø12,2                   | x6  |
| 16 |  | Ø12,4 (NFE 25-511)      | x4  |
| 17 |  | Ø13,0                   | x4  |
| 18 |  | M12 (8)                 | x4  |




| 8.8           |                |
|---------------|----------------|
| M8 - 25 (Nm)  | M14 - 135 (Nm) |
| M10 - 50 (Nm) | M16 - 200 (Nm) |
| M12 - 85 (Nm) |                |


1

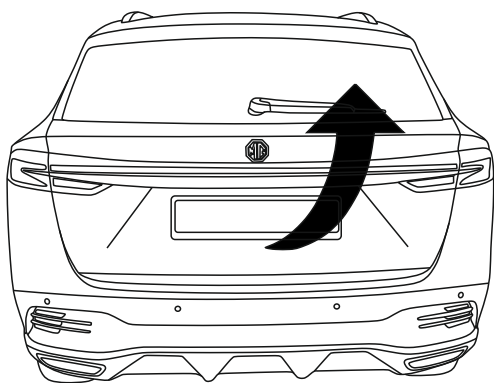


2

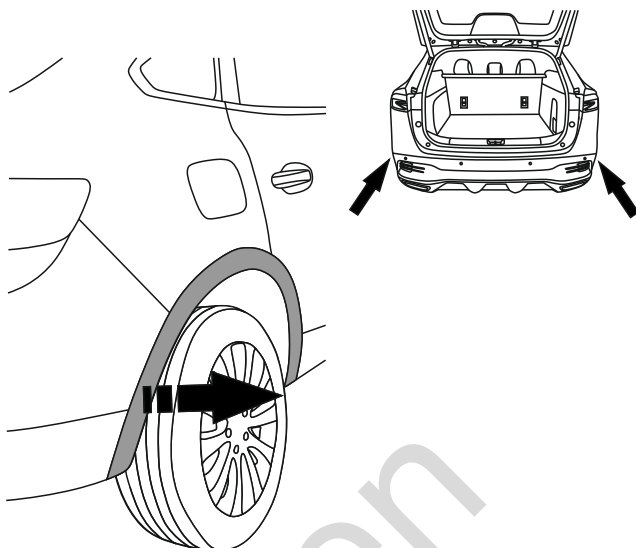


3

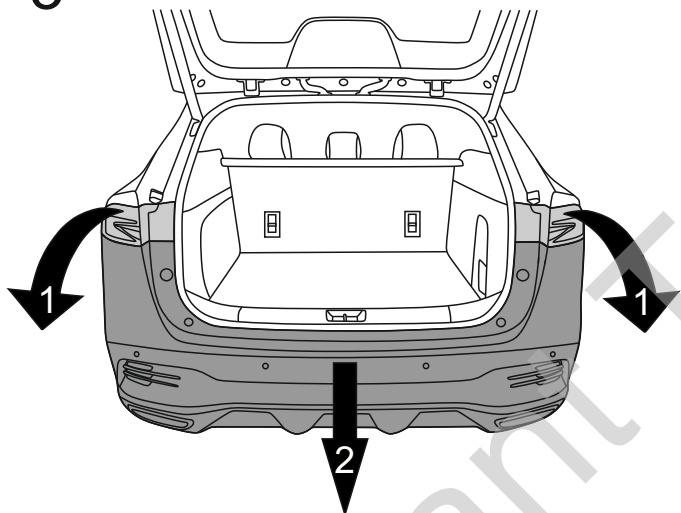

4

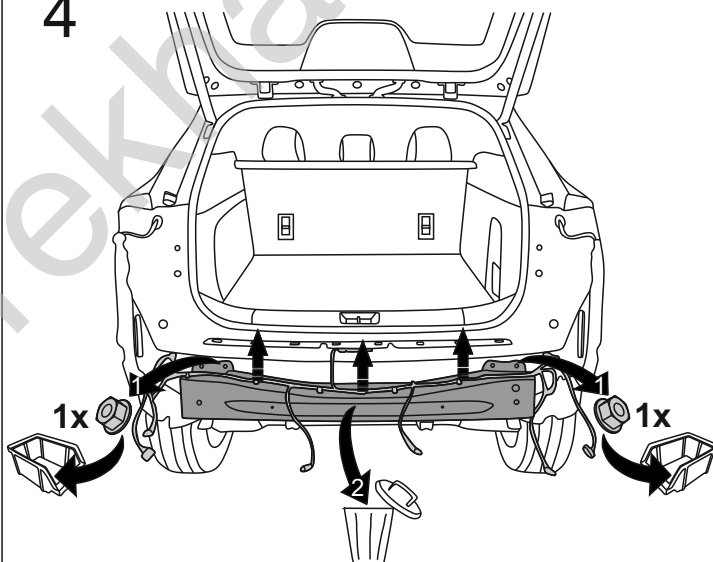

5

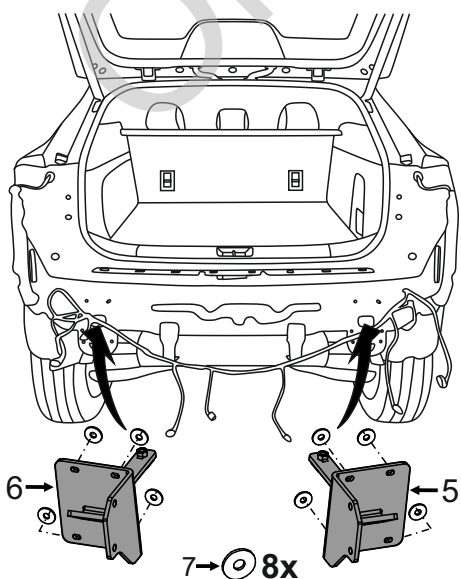

6

